

# Touch 5 Retrofit Instructions



## REQUIRED FOR REPLACING THE CZONE 3.5" DISPLAY INTERFACE:

80-911-0135-00 - CZONE TOUCH 5 RETROFIT PLATE 12V KIT

80-911-0136-00 - CZONE TOUCH 5 RETROFIT PLATE 24V KIT


(Note: 80-911-0136-00 supplied with 3A 24/12V Converter)

### Note - Check the following before proceeding:

- Check supply voltage of existing 3.5" Display Interface installation. The Touch 5 only accepts 12V, if system is 24V then a suitable 24/12V DC Converter must be installed (supplied in kit part# 80-911-0136-00)
- Check dimensions on template to ensure correct
- Download Touch 5 Installation & User Guide from [www.czone.net](http://www.czone.net) for Touch 5 specific installation and wiring instructions

### Step By Step Installation Process:

1. Place supplied Touch 5 Mounting Template over existing 3.5" Display Interface cutout using adhesive tape, ensure the template is centered
2. Cut out shaded area and remove
3. Remove plastic bezel from Touch 5
4. Insert Touch 5 into retrofit plate, ensure gasket is fitted
5. Connect existing NMEA 2000 drop cable to the Touch 5 NMEA 2000 connector
6. Connect 12VDC power to Touch 5. Ensure DC/DC converter is installed if the boats DC supply is 24V (supplied with kit part# 80-911-0136-00)
7. Secure Touch 5 and retrofit plate to mounting wall using screws supplied with Touch 5

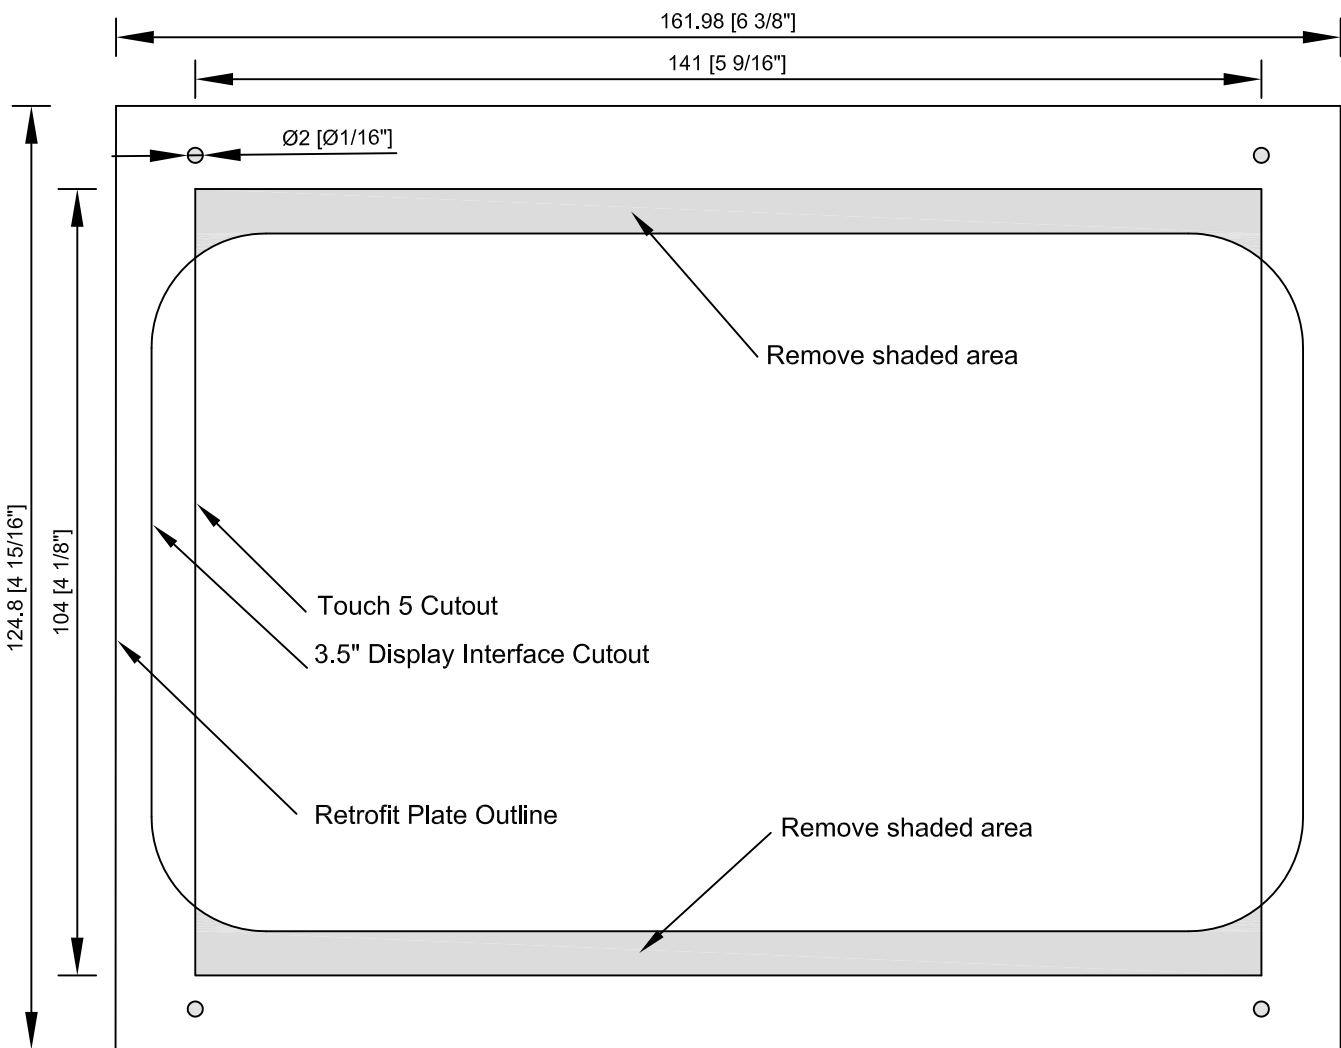

Check scale before cutting.

100mm [3 15/16"]

Dated: 01/19/17